

SKU:B6C1BAASM



LED Amber Beacon



Specification

| | |
|-------------------|-----------------------------|
| Input Voltage | 10-30VDC |
| Power Consumption | 1.9 A @12VDC |
| Operating Temp | -40°C to 65°C |
| Mounting Options | Surface Mount |
| IP Rating | IP 67 |
| Approvals | ECE R65 (Amber) / R10 (EMC) |

| | Flash Pattern | Flash per minute |
|---|---------------|------------------|
| 1 | Single | 150 |
| 2 | Double | 74 |
| 3 | Triple | 76 |
| 4 | Quad | 75 |
| 5 | Rotate | 143 |

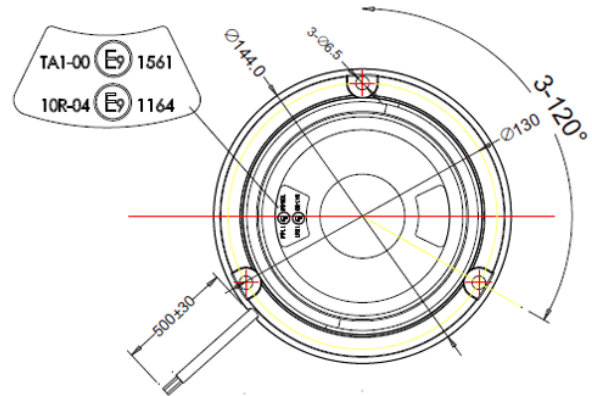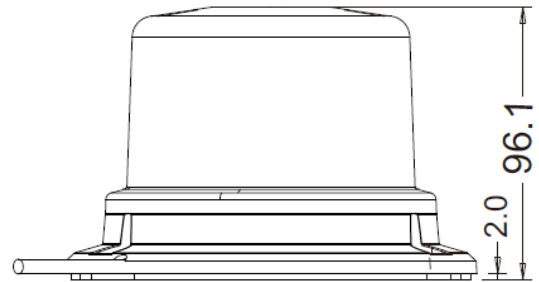

Description

The mid size Base6 LED Beacon is a great alternative to the traditional halogen rotating beacon. It has no moving parts and a simulated rotating flash pattern in addition to 4 other patterns. Manufacturer 3 Year "no hassle" warranty for you peace of mind.



RED
GREEN
BLUE

To + VDC Battery Source
Tap + VDC to change pattern
To Chassis Ground

