

# 320W Single Output Switching Power Supply HLG-320H-xx ADM series



### ■ Features :

- Universal AC input / Full range (up to 305VAC)
- Built-in active PFC function
- High efficiency up to 95%
- Protections: Short circuit / Over current / Over voltage / Over temperature
- Cooling by free air convection
- OCP point adjustable through output cable or internal potentiometer
- IP67 / IP65 design for indoor or outdoor installations
- $^{\bullet}\,$  Type HL LED Driver for use in Class  $\,I$  , Division 2 hazardous location luminaires
- Three in one dimming function (1~10Vdc or PWM signal or resistance)
- Suitable for LED lighting and street lighting applications
- · Compliance to worldwide safety regulations for lighting
- Suitable for dry / damp / wet location
- 7 years warranty (Note.10)


















HLG-320H-12 A Blank : IP67 rated. Cable for I/O connection.

- A: IP65 rated. Output voltage and constant current level can be adjusted through internal potentiometer.
- B: IP67 rated. Constant current level adjustable through output cable with 1~10Vdc or PWM signal or resistance.
- C: Terminal block for I/O connection. Output voltage and constant current level can be adjusted through internal potentiometer.
- D (option): IP67 rated. Timer dimming function, contact MEAN WELL for details.


### **SPECIFICATION**

	ATION							J	J						
MODEL		HLG-320H-12	HLG-320H-15	HLG-320H-20	HLG-320H-24	HLG-320H-30	HLG-320H-36	HLG-320H-42	HLG-320H-48	1					
	DC VOLTAGE	12V	15V	20V	24V	30V	36V	42V	48V	54V					
	CONSTANT CURRENT REGION Note.4	6~12V	7.5 ~ 15V	10 ~ 20V	12 ~ 24V	15 ~ 30V	18 ~ 36V	21 ~ 42V	24 ~ 48V	27 ~ 54V					
	RATED CURRENT	22A	19A	15A	13.34A	10.7A	8.9A	7.65A	6.7A	5.95A					
	RATED POWER	264W	285W	300W	320.16W	321W	320.4W	321.3W	321.6W	321.3W					
	RIPPLE & NOISE (max.) Note.2	150mVp-p	150mVp-p	150mVp-p	150mVp-p	200mVp-p	250mVp-p	250mVp-p	250mVp-p	350mVp-p					
	VOLTAGE ADJ. RANGE Note.6	10.8 ~ 13.5V	13.5 ~ 17V	17 ~ 22V	21 ~ 26V	26 ~ 32V	32 ~ 39V	38 ~ 45V	43 ~ 52V	49 ~ 58V					
UTPUT		Can be adjusted by internal potentiometer A type and C type only													
	CURRENT ADJ. RANGE	11 ~ 22A	9.5 ~ 19A	7.5 ~ 15A	6.67 ~ 13.34A	5.35 ~ 10.7A	4.45 ~ 8.9A	3.8 ~ 7.65A	3.35 ~ 6.7A	2.97 ~ 5.9					
	VOLTAGE TOLERANCE Note.3	±3.0%	±2.0%	±1.5%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%					
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%					
	LOAD REGULATION	±2.0%	±1.5%	±1.0%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%					
		2500ms,80m		00ms,80ms/2			= 0.070	1 = 0.070	1 = 0.070	1 = 0.070					
	HOLD UP TIME (Typ.)	15ms at full lo			JOVAO at Iuii I	oau									
		90 ~ 305VAC 127 ~ 431VDC													
	FREQUENCY RANGE	47 ~ 63Hz													
	POWER FACTOR (Typ.)	PF>0.98/115VAC, PF>0.95/230VAC, PF>0.94/277VAC at full load (Please refer to "Power Factor Characteristic" curve)  THD< 20% when output loading ≥ 50% at 115VAC/230VAC input and output loading ≥ 75% at 277VAC input													
	TOTAL HARMONIC DISTORTION									0.50'					
	EFFICIENCY (Typ.) (230Vac)	91%	92.5%	93.5%	94%	94%	94.5%	95%	95%	95%					
NPUT	EFFICIENCY (Typ.) (277Vac)	91.5%	93%	94%	94.5%	94.5%	95%	95%	95%	95%					
	AC CURRENT (Typ.)	3.5A / 115VAC 1.65A / 230VAC 1.45A / 277VAC													
	INRUSH CURRENT(Typ.)	COLD START 70A(twidth=1010/rs measured at 50% Ipeak) at 230VAC													
	MAX. No. of PSUs on 16A CIRCUIT BREAKER	1 unit (circuit breaker of type B) / 2 units (circuit breaker of type C) at 230VAC													
	LEAKAGE CURRENT	<0.75mA / 277VAC													
	OVER OURDENT	95 ~ 108%													
	OVER CURRENT Note.4	Protection type : Constant current limiting, recovers automatically after fault condition is removed													
	SHORT CIRCUIT	Hiccup mode, recovers automatically after fault condition is removed													
ROTECTION		14 ~ 17V	17.5 ~ 21V		27 ~ 33V	33 ~ 37V	40 ~ 46V	46.5 ~ 53V	53.5 ~ 60V	59 ~ 65V					
	OVER VOLTAGE	Protection tvp		and latch off o/	p voltage, re-p	ower on to reco	ver	1	1	1					
	OVER TEMPERATURE	• • • • • • • • • • • • • • • • • • • •													
	WORKING TEMP.	Shut down and latch off o/p voltage, re-power on to recover													
		-40 ~ +70°C (Refer to "Derating Curve")  20 ~ 95% RH non-condensing													
WINDOWNENT	WORKING HUMIDITY			ig											
NVIRONMENT	STORAGE TEMP., HUMIDITY	-40 ~ +80°C,													
	TEMP. COEFFICIENT	±0.03%/℃													
	VIBRATION			le, period for 7											
	SAFETY STANDARDS Note.7			2.2 No. 250.0-0 ept for HLG-32			independent,	IP65 or IP67 (e	except for HLG-	-320H C typ					
	WITHSTAND VOLTAGE	I/P-O/P:3.75	KVAC I/P-F	G:2KVAC O/	P-FG:1.5KVA	С									
SAFETY &	ISOLATION RESISTANCE	I/P-O/P. I/P-F	G. O/P-FG:10	00M Ohms / 50	0VDC / 25°C/	70% RH									
MC	EMC EMISSION						lass C (≥50%	load) : EN610	00-3-3						
	EMC IMMUNITY	Compliance to EN55015, EN55022 (CISPR22) Class B, EN61000-3-2 Class C (≥50% load) ; EN61000-3-3													
	MTBF	157.1K hrs min. MIL-HDBK-217F (25°C)													
THERS	DIMENSION			7K 2111 (20 0)	/										
TILKS	PACKING	252*90*43.8mm (L*W*H)													
IOTE	All parameters NOT special     Ripple & noise are measure     Tolerance : includes set up     Please refer to "DRIVING M     Derating may be needed ur     6. A type and C type only.     Safety and EMC design refe     Length of set up time is me.	1.88Kg; 8pcs/16Kg/0.95CUFT  y mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.  d at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.  olerance, line regulation and load regulation.  ETHODS OF LED MODULE".  der low input voltages. Please check the static characteristics for more details.  r to EN60598-1, subject CNS15233, GB7000.1, FCC part18.  sured at cold first start. Turning ON/OFF the power supply may lead to increase of the set up time.  red as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the all equipment manufacturers must re-qualify EMC Directive on the complete installation again.													

- 10. Refer to warranty statement.
   11. To fulfill requirements of the latest ErP regulation for lighting fixtures, this LED power supply can only be used behind a switch without permanently connected to the mains

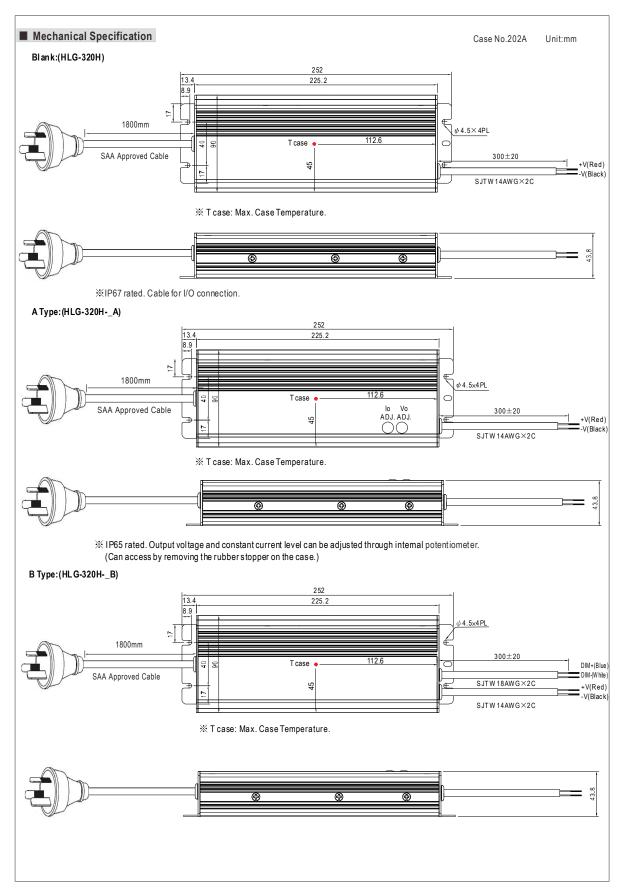



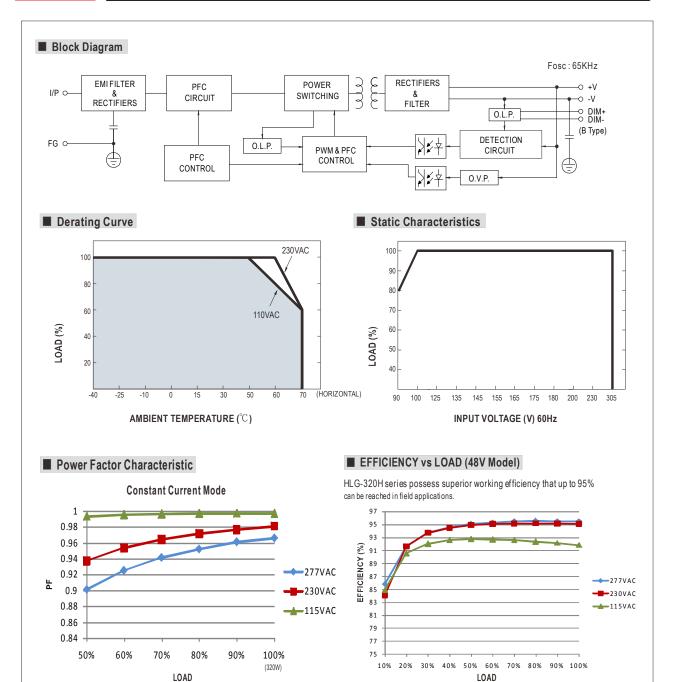


## ■ DRIVING METHODS OF LED MODULE

There are two major kinds of LED drive method "direct drive" and "with LED driver".

 $A typical \, LED \, power \, supply \, may \, either \, work \, in \, "constant \, voltage \, mode \, (CV) \, or \, constant \, current \, mode \, (CC)" \, to \, drive \, the \, LEDs.$ 

Mean Well's LED power supply with CV+ CC characteristic can be operated at both CV mode (with LED driver, at area (A) and CC mode (direct drive, at area (B).

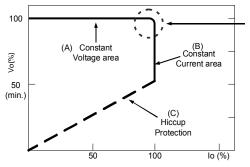


Typical LED power supply I-V curve

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.



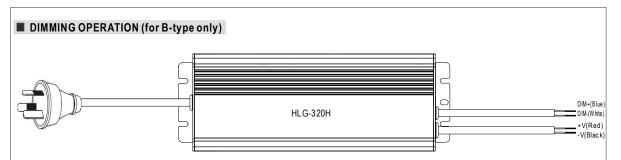

- 🔆 Built-in 3 in 1 dimming function, IP67 rated. Output constant current level can be adjusted through output cable by connecting a resistance or 1 ~ 10Vdc or 10V PWM signal between DIM+ and DIM-.
- ※ Please DO NOT connect "DIM-" to "-V"
- X Reference resistance value for output current adjustment (Typical)

Resistance	Single driver	10K $\Omega$	$20$ Κ $\Omega$	<b>30K</b> Ω	<b>40K</b> Ω	50KΩ	$60 \mathrm{K}\Omega$	<b>70K</b> Ω	80KΩ	90KΩ	100KΩ	OPEN
	Multiple drivers (N=driver quantity for synchronized dim ming operation)	10KΩ/N	20K Ω /N	30K Ω /N	40K Ω /N	50K Ω /N	60K Ω /N	70KΩ/N	80K Ω /N	90K Ω /N	100KΩ/N	
Percentage of rated current		10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

※ 1 ~ 10V dimming function for output current adjustment (Typical)


Dimming value	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

% 10V PWM signal for output current adjustment (Typical): Frequency range :100HZ ~ 3KHz

Duty value	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

- XUsing the built-in dimming function on B-type model can't turn the lighting fixture totally dark. Please refer to the connection method below to achieve 0% brightness of the lighting fixture connecting to the LED power supply unit.
- \*Direct connecting to LEDs is suggested, but is not suitable for using additional drivers.

 $Dimming\ connection\ diagram\ for\ turning\ the\ lighting\ fixture\ ON/OFF:$ 

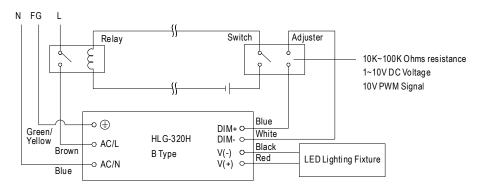

Using a switch and relay can turn ON/OFF the lighting fixture.

- 1. Output constant current level can be adjusted through output cable by connecting a resistance or 1~10Vdc or 10V PWM signal between DIM+ and DIM-.
- 2. The LED lighting fixture can be turned ON/OFF by the switch.



