


E8EOS4

TECHNICAL SPECIFICATIONS


Flash Patterns	40
Sync Feature	Yes
Dimming Feature	Yes
Voltage	10-40 VDC
Current Draw @12.8VDC	1.0 Amps
LEDs	4 x 3 Watt
IP Rating	IP67
Working Temperature	-40°C to + 50°C

Ultra low profile surface mount, only 10mm deep!
Solid or split colours. Includes stainless steel mounting screws.

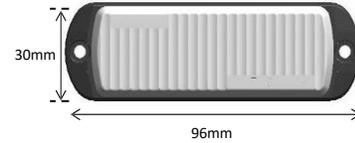

DESCRIPTION	PART NUMBER
Solid Colours 4 LED	E8EOS4(x)
Split Colours 4 LED	E8EOS4(xx)

REPLACE (x) or(xx) IN ORDER NUMBER FOR COLOUR SELECTION




E8EOS6

TECHNICAL SPECIFICATIONS

Flash Patterns	40
Sync Feature	Yes
Dimming Feature	Yes
Voltage	10-40 VDC
Current Draw @12.8VDC	1.3 Amps
LEDs	6 x 3 Watt
IP Rating	IP67
Working Temperature	-40°C to + 50°C

Ultra low profile surface mount, only 10mm deep!
Solid or split colours. Includes stainless steel mounting screws.

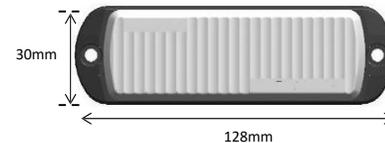

DESCRIPTION	PART NUMBER
Solid Colours 6 LED	E8EOS6(x)
Split Colours 6 LED	E8EOS6(xx)

REPLACE (x) or(xx) IN ORDER NUMBER FOR COLOUR SELECTION

