

LED Load Resistors

DESCRIPTION

load resistors are designed to draw the same current as a 21 watt globe. They can be used on vehicles that have electronic components that are not LED compatible. The resistor should ALWAYS be wired between the input wires of the lamp, NOT the chassis of the vehicle or trailer! If fitted to the Chassis, a bad earth connection is possible, and can result in problems with the lighting system of the vehicle!

Specification


| | | |
|------------|-----------------------|----------|
| | 12 Volt | 24 Volt |
| Package | Twin Pack | |
| Function | LED Load Resistor | |
| Voltage | 12V | 24V |
| Watts | 50 watt | |
| Resistance | 6Ω Ohms | 24Ω Ohms |
| Cable | 18AWG, 10cm each side | |
| Housing | Aluminium | |

Product Features

- Designed for late model vehicles that display light failure warning.
- 12 Volt 50 Watt 6Ω Ohms
- 24 Volt 50 Watt 24Ω Ohms
- IP67 Shock/dust/water proof
- 5 Year Warranty

Variant SKU Part Numbers

| | |
|----------|---------------------|
| B6LR12/2 | - 12 Volt Twin Pack |
| B6LR24/2 | - 24 Volt Twin Pack |

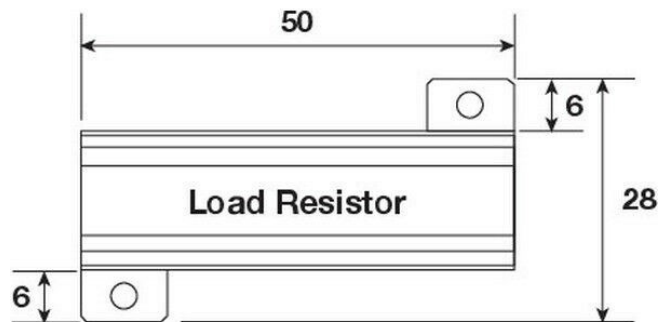

Warning: Load resistors can reach temperatures up to 170°C, do not mount the resistor on any surface that can be melted by the heat of the resistor, this includes plastics, hoses or painted surfaces. Load Resistors should be mounted to a metal surface to allow for the best heat displacement possible.

