

# NIGHTSTICK<sup>®</sup>

Tough, Durable, Affordable™

## Intrinsically Safe Permissible Polymer Dual-Light™ Flashlights

Flashlight



Floodlight



Dual-Light



TECHNOLOGY

These Dual-Light™ flashlights are cETLus, ATEX, IECEx, MSHA and INMETRO listed Intrinsically Safe Permissible. They each use a CREE® LED rated at 120 lumens that works in conjunction with a high-efficiency deep parabolic reflector to create a usable flashlight beam rated at 170 meters. A 120 lumens unfocused floodlight is integrated into the housing which is perfect for close-up illumination. Additionally both the flashlight and the floodlight can be turned on at the same time for maximum versatility. The dual body switches provide momentary or constant-on functionality for the flashlight and on/off functionality for the floodlight. Power comes from 3 AA batteries (not included).

**INTRINSICALLY SAFE  
PERMISSIBLE**



XPP-5422G

**120** Flashlight  
Lumens

**120** Floodlight  
Lumens

**240** Dual-Light™  
Lumens

- cETLus, ATEX, IECEx, MSHA and INMETRO listed Intrinsically Safe Permissible
- Flashlight/floodlight/Dual-Light™
- Beam distance rated at 170 meters
- Engineered polymer housing



XPP-5422B

**XPP 5420 series**





# Intrinsically Safe Permissible Polymer Dual-Light™ Flashlights



XPP-5422G



XPP-5422B


High-efficiency deep parabolic reflector

### FEATURES

- Flashlight – floodlight – Dual-Light™
- CREE® LED technology – 50,000 + hours LED life
- Momentary or constant-on flashlight
- Sharp focused beam for distance illumination
- Unfocused wide-beam floodlight for close-up illumination
- Dual-Light (flashlight & floodlight at same time) for maximum versatility
- Engineered polymer housing
- Non-slip grip
- Dual body switches
- Waterproof
- Impact & chemical resistant
- Built-in pocket/belt clip
- Includes removable lanyard
- Requires 3 AA batteries (not included)
- Available in black & green
- Limited Lifetime Warranty\*

### SPECIFICATIONS

- Lumens: flashlight-120, floodlight-120, dual-light-240
- Run-time: flashlight-17.5 hrs, floodlight-17.5 hrs, dual-light-4.5 hrs
- Beam distance: 170 meters
- Water rating: IP-X7 waterproof
- Drop rating: 2 meters
- Length: 7in, head diameter: 1.8in, handle diameter: 1.5 x 1.1in, weight: 6.9oz




### INCLUDED

- Flashlight with built-in pocket/belt clip
- Removable lanyard

### SAFETY RATING

cETLus, ATEX, IECEx, MSHA and INMETRO listed Intrinsically Safe Permissible

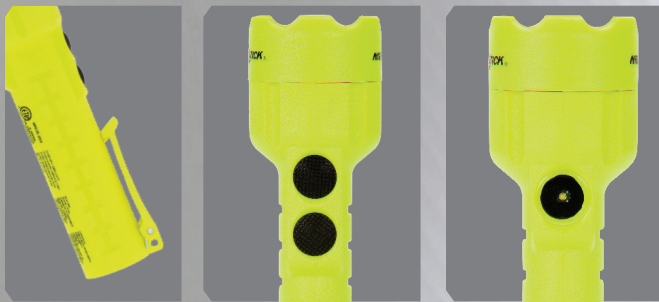

Built in pocket/belt clip

Dual body switches

Wide-beam floodlight

Patent 7,738,229



Permissible Nightstick 5422 Flashlight/Floodlight

**MSHA** APPROVAL No. 20-A130001-0

TESTED FOR INTRINSIC SAFETY IN METHANE-AIR MIXTURES ONLY

WARNINGS: 1) MSHA approved for use with three AA Duracell Type PC1500, Energizer Type EN91, and Energizer Type L91 batteries only.  
 2) Replace the batteries in fresh air only and replace all batteries at the same time. Do not mix batteries from different manufacturers or of different types.  
 3) Energizer Lithium (Type L91) batteries are to be replaced by a qualified technician only.  
 4) The Model Nightstick 5422 must not be opened in areas where permissibility is required.

**Intertek** ID 4003544 INTRINSICALLY SAFE SECURITE INTRINSEQUE

**CE** 0359

**Seguranca** INMETRO

CLASS I DIV 1 GRPS A-D T3 Ex ia I Ma  
 CLASS II & III DIV 1 GRPS E-G T135C Ex ia IIC T3 Ga  
 CLASS I ZONE 0 AEx ia IIC T3 Ga  
 CLASS I ZONE 0 Ex ia IIC T3 Ga  
 I M 1 Ex ia I Ma  
 II 1 G Ex ia IIC T3 Ga

Ex ia I Ma  
 Ex ia IIC T3 Ga  
 Intertek ITS 13 ATEX27837X  
 IECEx ETL 13.0026X  
 -20°C ≤ Tamb ≤ +40°C  
 1.5V/Cell AA Alkaline

**Conforms to:**  
 ANSI/UL STD 913, ANSI/UL 60079-0, ANSI/UL 60079-11, ANSI/ISA 60079-26

**Certified to:**  
 CAN/CSA STD C22.2 No 157, CAN/CSA STD C22.2 No 60079-0, CAN/CSA STD C22.2 No 60079-11, CSA STD C22.2 No 25

Model	UPC 0 17398
XPP-5422G	80093 8
XPP-5422B	80094 5

\*Limited Lifetime Warranty • Product is warranted to be free from defects in workmanship and materials for the original purchaser's lifetime. The Limited Lifetime Warranty includes the LEDs, housing and lenses. Rechargeable batteries, chargers, switches, electronics and included accessories are warranted for a period of two (2) years with proof of purchase. Disposable, non-rechargeable batteries are excluded from this warranty. Normal wear and failures which are caused by accidents, misuse, abuse, faulty installation and lightning damage are also excluded.