



200W LED HIGHBAY

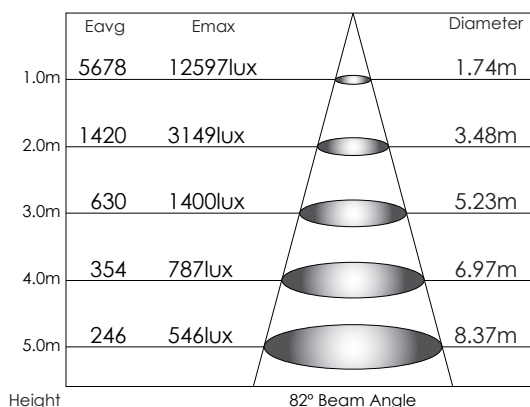

SPECIFICATIONS

| | |
|---------------------------------|---------------------------|
| Input Voltage | 100V~277V AC |
| Frequency | 50 / 60Hz |
| System Power | 200W |
| Power Factor | >0.95 |
| LED Source | Philips Lumileds |
| LED Chip Quantity | 408pcs |
| Driver | MEANWELL / SOSEN / EASEIC |
| Luminous Efficacy | 110lm/W |
| Initial Luminous Flux | 22,000lm |
| Beam Angle | 90° AL/PC Reflector |
| Colour Temperature | 5000 ~ 5700K |
| CRI | >Ra80 |
| THD (Total Harmonic Distortion) | <15% |
| Working Environment | -25°C ~ 40°C |
| LED Life Span | 50,000 hours |
| Body and Shell Materials | Aluminium Alloy |
| Lamp Dimensions (mm) | 391.5 x Ø270mm |
| Reflector Dimensions (mm) | 212 x Ø410mm |
| Net Weight | 7.5kg |
| IP Rating | IP65 |
| Warranty | 5 years |

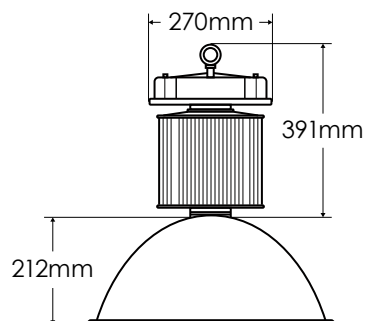

KEY FEATURES

Energy efficient LED Highbay

High brightness COB LED Chip

Die cast aluminium housing with cooling fins for thermal management

Includes mounting ring for easy hanging installation

Ergonomic light distribution to achieve even illuminating effect

Energy-efficient interior lighting for warehouses, factories, and gymnasiums