

LUX PANEL

Frosted Lens

Cool White



FEATURES

CE, ROHS, REACH, ECE R10 certified




IP 67/IP69K Rated

Full encapsulated for moisture, vibration and corrosion resistance



Can be widely applied for all vehicles, marine etc.

Surface mount

3-year warranty

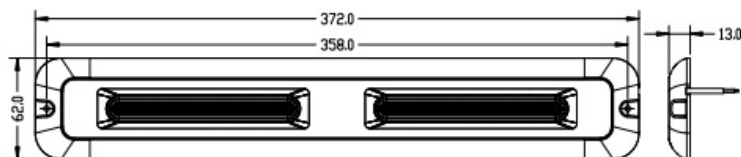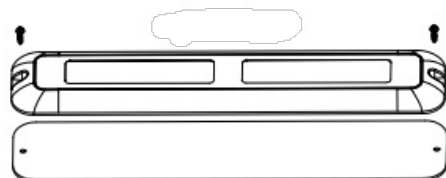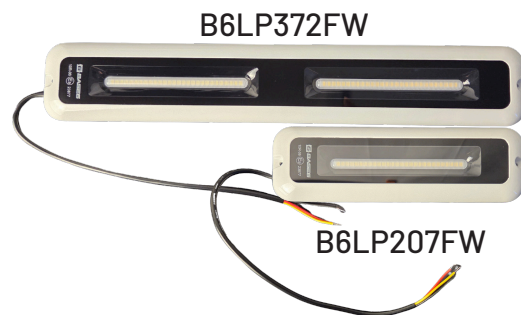

B6LP372FW

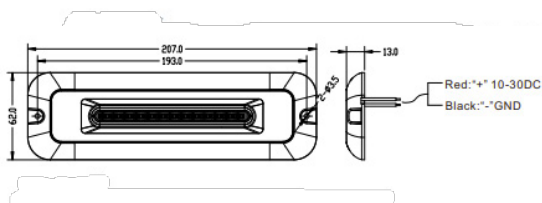

Red: + 10-30V DC
Black: - GND

B6LP207FW

SPECIFICATIONS

Part Number	B6LP207FW	B6LP372FW
LED Qty	26 pcs Osram LED	52pcs Osram LED
Temperature	-45-65°C	-45-65°C
Voltage	10-30VDC	10-30VDC
IP Rating	IP67/IP69K	IP67/IP69K
Effective Lumen	1200LM	2400LM
Dimension	207*62*13 mm	372*62*12 mm
Current Draw	1A at 12VDC, 0.5A at 24VDC	2A at 12VDC, 1A at 24VDC
Colour Temp	5700K-6500K	5700K-6500K
Cable Length	300mm	300mm