


SKU:B6X70

7" Base6 Driving Light X70

base6

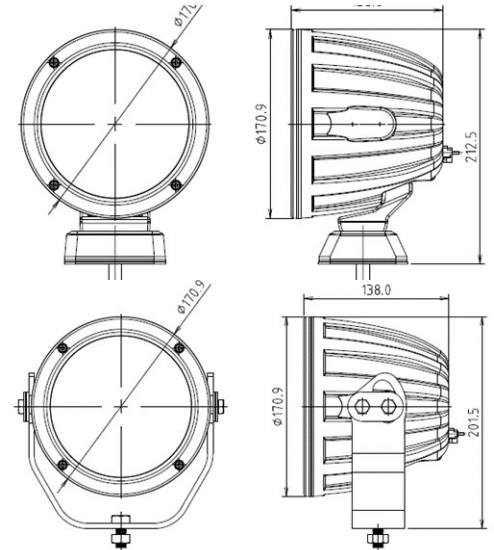

Specification

Input Voltage	9 - 32VDC
Output Wattage	60W
Current Draw	2.50A @ 24V
Operating Temp	-40°C to +65°C
IP Rating	IP68
Beam Angle	Spot Cover & Flood Cover
Luminous Flux Rating	6000lm
Life Span (hr)	50,000hrs Runtime
Weight	3.00 kgs
Vibration (G)	8.6

Accessories & Optional Parts

B6X70SMFC - Stud mount w/Flood Cover
B6X70MSC - Stud Mount w/Spot Cover
B6X70FCOVER - Flood Cover
B6X70SCOVER - Spot Cover
B6X70BM - Optional Bracket Mount

Features

- Polycarbonate lense.
- Spot and Flood beam angles can be changed on the go via lense covers.
- Heavy Duty powder coated aluminium housings.
- Deutsch Connector.
- Strong new stud mounting system for high vibration durability.

