

No other light offers 180 degree output - specially designed reflector amplifies and throws the light at the perfect angle to increase visibility at intersections and offer side warning illumination.

Under Mirror Light



9 LED, Single Colour
18 LED, Dual Colours
18 LED, Tri Colours

#ENT2B3(x)
#ENT2B3(xx)
#ENT2B3(xxx)

Surface Mount



9 LED, Single Colour
18 LED, Dual Colours
18 LED, Tri Colours


#ENT3B3(x)
#ENT3B3(xx)
#ENT3B3(xxx)

Features

- The first light of its kind to offer critical intersection warning and side warning
- The only intersection light to provide a true 180° coverage at full intensity.
- Unique under mirror mount simplifies installation - labor saving light is much easier to install than traditional front mirror skull mounts - no mirrors to work behind or around
- Light can be surface mounted to any flat area on any type of vehicle - elevate your safety and visibility by mounting to the headache rack or body of the vehicle wherever additional lighting is needed
- Features cruise mode for steady burn if desired
- Under mirror light includes three mounting wedges (0, 5, 10 and 15 degrees) and foam gasket
- Light has separate control functionality and is sync compatible with sync 2 products
- Dual light allows either color to be set to flash or steady-burn
- Steady-burn white can be specified as a means of providing additional side/alley lighting
- The flasher has been integrated into the light to provide easier installation

Intersector Warning lights are available in a range of customisable colours

Colours: A ● B ● G ● R ● W ○

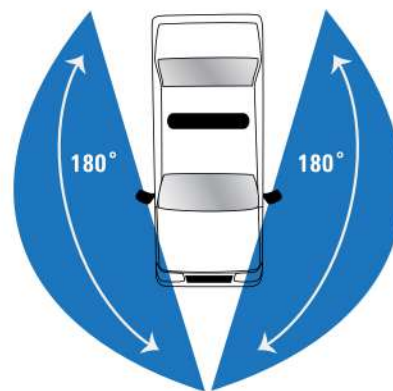

Technical Specifications

INPUT VOLTAGE	10-16 Vdc
CURRENT DRAW	9 LED Single Color, < 1.25 Amps; 18 LED Dual Color, < 1.25 Amps
LIGHT SYNC	24 single lighthead
FLASH PATTERNS	Solid, 30 color patterns; Dual 12 solid or 14 dual color patterns
OPERATING TEMPERATURE	-40° C to +65° C / -40° F to +149° F
DIMENSIONS	Length: 2.9" (7.4 cm) Height: 1.9" (4.8 cm) H Depth: 2.9" (7.4 cm)
MOUNTING	Under mirror or surface mount
CERTIFICATIONS	SAE J845 Class 1 WS3-1 (100) certified
WARRANTY	Five-year

